


# Elite Cooling for an Elegant Life Style !



# LARGEST RANGE OF MINIBARS FOR EVERY ROOM!

## Compressor Minibars



- CFC free, R 600a
- Low energy consumption and noise
- 60 ltrs. capacity available in elegant white colour
- Reversible door
- Lock (Optional)

Technical Details	RF 61 / 61 G
Door Option	Solid / Glass
Gross capacity	50 Ltrs
Input power	70 Watts
Energy consumption (EN 153) net / 24 hours	0.85 kWh
Temperature range	2°C - 10°C
Unit dimensions (W x D x H)	20" x 19" x 21"
20' Container load	350 Pcs
40' HC Container load	560 Pcs

Available in 15, 25, 30, 36, 40, 50 & 60 ltrs

## Absorption Minibars



- Ammonia refrigerant
- Very low energy consumption
- Silent operation
- Largest range to choose from
  - Sizes : 15 to 60 ltrs
  - Colour : Black, Brown, & White
  - Design : Regular, Deluxe & Glass



Lock



LED



Door Slider



Cooling Coil



RB 15



RB 25



RB 30



RB 40



RB 50



RB 15



RB 25



RB 30




RB 40



RB 50/  
RB 60



RB 60 G

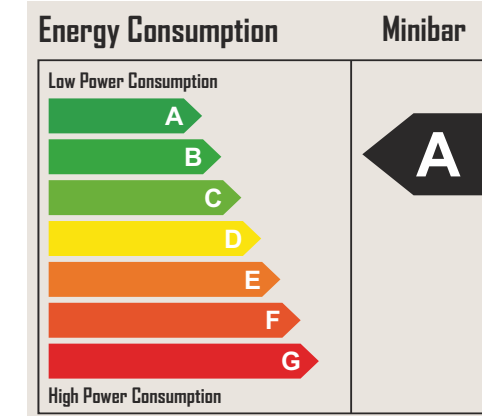

RB 30 G



RB 40 G



RB 50 G

# Some of Our Global Customers



## Installation Guidelines

A minimum air space of 10 cm. (4 inches) must be kept between the minibar and the walls or the furniture cabinet to allow proper air circulation and dispersal of heat.

## Absorption Minibars

### Standard Features

- Back Cover
- LED Light
- Reversible Door
- Automatic Defrosting
- Refrigerant - Ammonia
- Certification - UL, CB, CE, CCC, ISO:9001, ISO:14001

### Optional Features

- Colour : White / Brown\*
- Inside colour : White / Grey /Black\*
- Lock
- Door attachment
- Ice Tray

### Technical Data-Absorption Mini Bar

\*Minimum order quantity 200 pcs.

Technical Details	Description	RB 15(Dlx)	RB 25(Dlx)	RB 30/ RB 30(Dlx)	RB 30G	RB 40/ RB 40(Dlx)	RB 40G	RB 50/ RB 50(Dlx)	RB 50G	RB 61	RB 61G
Door Option		Flat	Flat	Round/Flat	Glass	Round/Flat	Glass	Round/Flat	Glass	Solid/Glass	Solid/Glass
Gross capacity	ltrs	15	25	30	30	40	40	50	50	50	50
Input power	Watts	65	65	65	65	65	75	90	90	90	90
Energy consumption (EN 153) net / 24 hours	kWh	0.75	0.75	0.75	0.75	0.8	0.85	1.05	1.1	1.05	1.1
Temperature range	°C	2°C - 10°C	2°C - 10°C	2°C - 10°C	2°C - 10°C	2°C - 10°C	2°C - 10°C	2°C - 10°C	2°C - 10°C	2°C - 10°C	2°C - 10°C
Unit dimensions (w x d x h)	Inch	14 x 12 x 18	14 x 15 x 18	16 x 17 x 20	16 x 17 x 20	16 x 18 x 22	16 x 18 x 22	16 x 18 x 27	16 x 18 x 27	18 x 19 x 24	18 x 19 x 24
20' Container load	Pcs	464	360	240	240	206	206	171	171	132	132
40' HC Container load	Pcs	1040	840	620	620	484	484	438	438	352	352

Note: Specifications, features and colours are subject to change without any notice, due to continuous product development.

**All Models except 30/40 ltrs are only against confirmed orders.**



Authorised Distributor

Customer Care : +91-8882302532, Email : [elancare@elanpro.net](mailto:elancare@elanpro.net)  
 Enquiry : +91-901510 6925, 080-4163 8274, Email : [enquiry@elanpro.net](mailto:enquiry@elanpro.net)  
 Facebook : [www.facebook.com/elanprogroup](http://www.facebook.com/elanprogroup), Website : [www.elanpro.net](http://www.elanpro.net)